


ABOUT US

Dahop®

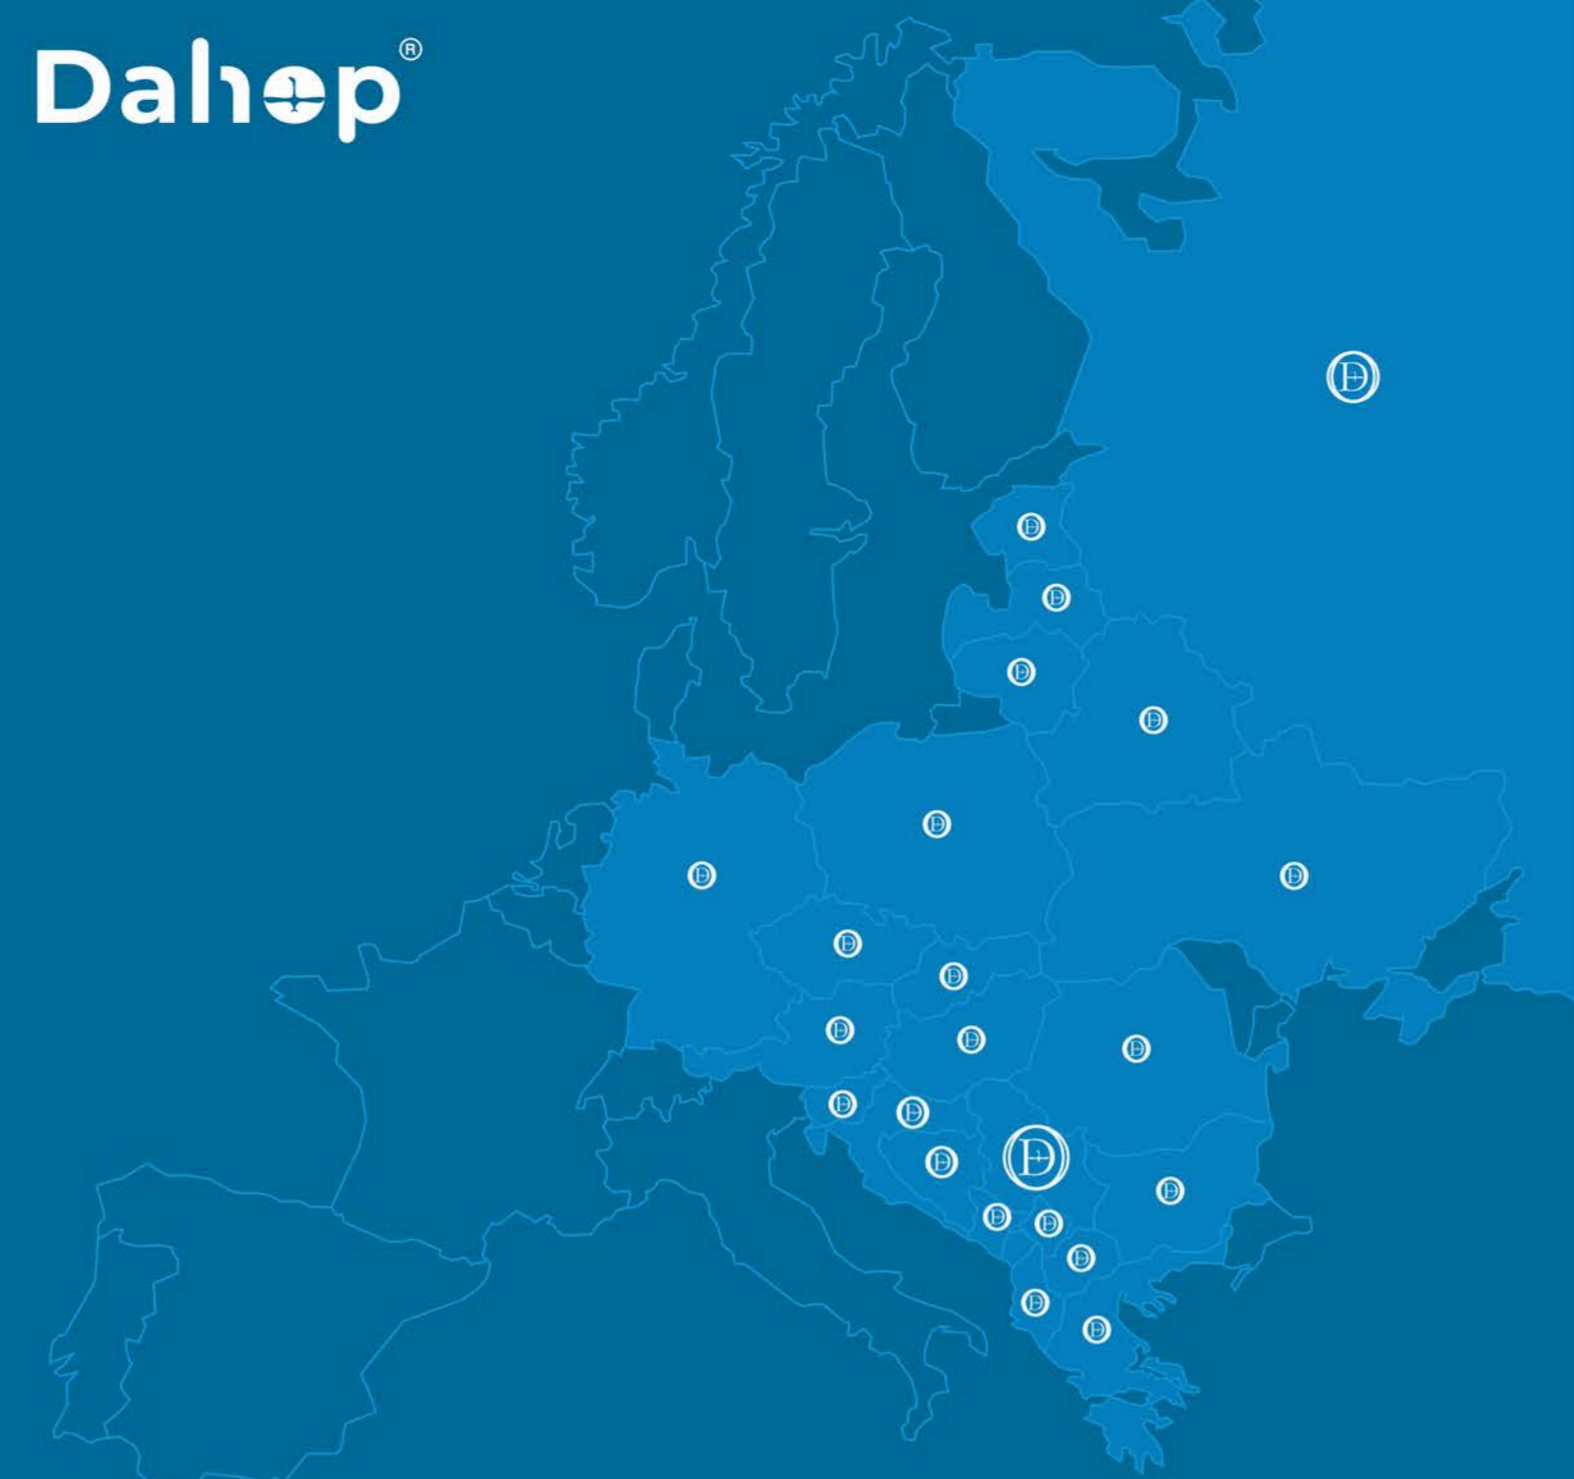

Dahop®

Company for treatment and coating of metals

CONTACT

+381 18 4150120
+38165 8805880

zoran.resavac@utva.rs

www.dahop-utva.com

Petra Zeca 39, 18220 Aleksinac, Srbija

www.dahop-utva.com

Dahop Utva d.o.o. Aleksinac established the line for hot dip galvanized strip and wire for earthing in 2010, located in Aleksinac, south - east Serbia.

Company Dahop is a member of UTVA SILOSI A.D. KOVIN GROUP (www.utva.rs)

The stock company "UTVA SILOSI" is producing tubes, silo, profiles and equipment, and offers steel service center services: cutting to length, and slitting of steel. It was established in 1979 as part of "UTVA" Pancevo. Since 1990 operates independently.

Dahop Utva d.o.o. offers a variety of sizes of Hot Dip Galvanized Earthing Strip (20 to 50mm width and from 2 up to 5mm thickness per customer request), and HDG wire in thickness of 8mm and 10mm in diameter, made out of best construction steel quality materials (S235JRG steel), according to EN 62561-2, min 370-gr/m2 Zinc layer at competitive prices for our products.

Hot dip galvanized steel strip and wire is commonly used by electro and building industries, usually as lightning ground conductors (overhead power lines, ground power lines, electro equipment, gas or oil pipelines, buildings..)

In order to ensure the stability of quality in production process, sales and commercial, company Dahop Utva d.o.o. Aleksinac organized its operations in accordance with international standard ISO 9001




ABOUT HOT DIP GALVANIZED STRIP AND WIRE

Hot dip galvanized steel strip and wire

according to EN 62561-2 for use in earth - termination and lightning protection systems as well for ring equipotential bonding

Hot dip galvanized steel strip and hot dip galvanized wire, as lightning protection system components, are used for:

- lightning protection capturing and directing lightning discharges into the object
- horizontal ground electrode system buried in the ground ensuring direct contact with the ground

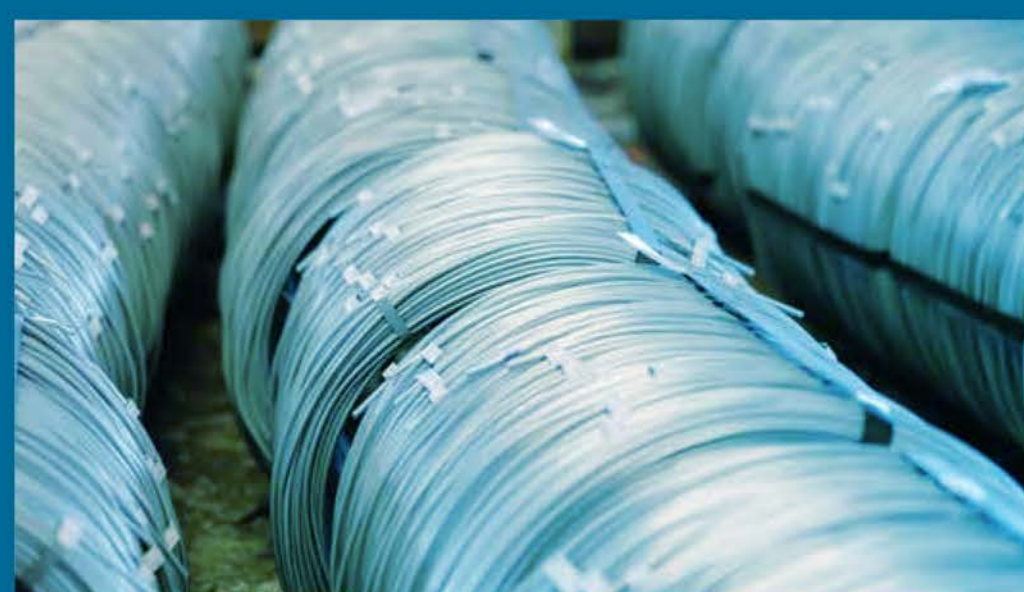

HOT DIP GALVANIZED STRIP

ASORTIMAN H.D.G. STRIP	Thickness (mm)						
	2,0	2,5	3,0	3,5	4,0	5,0	6,0
Width (mm)	Weight (kg/m)						
	20	0,319	0,400	0,484	0,567	0,650	0,800
25	0,400	0,504	0,607	0,710	0,800	1,000	
30	0,484	0,607	0,731	0,845	0,968	1,215	
35	0,567	0,710	0,845	0,990	1,133	1,420	
40	0,650	0,803	0,968	1,133	1,298	1,620	
45	0,731	0,906	1,091	1,277	1,453	1,825	
50	0,800	1,009	1,215	1,420	1,620	2,020	2,420

Standard coil weight: 50 kg (+/-3kg); on custom order from 20-25 kg to 50 kg (+/- 3 kg)



HOT DIP GALVANIZED WIRE

ASORTIMAN H.D.G. WIRE	Weight (kg/m)					
Ø 8	0,413					
Ø 10	0,638					

Standard coil weight: 50 kg (+/-3kg); on custom order from 20-25 kg to 50 kg (+/- 3 kg)



CERTIFICATES

